


# RCCS-ISC

## TECHNICAL SPECIFICATIONS-DIMENSIONS RCCS-ISC

COMPONENT	HEIGHT	WIDTH	DEPTH
<b>Base</b>	5.0" (12.7 cm)	4.0" (10.2 cm)	8.0" (20.3 cm)
<b>Power Supply</b>	2.5" (6.35 cm)	5.0" (12.7 cm)	14.0" (5.5 cm)
COMPONENT	WEIGHT	ROTATIONAL SPEED	—
<b>Base</b>	2.3 lbs (1.08 Kg)	7.45 RPM	—
<b>Power Supply</b>	2.0 lbs (.94Kg)	—	—

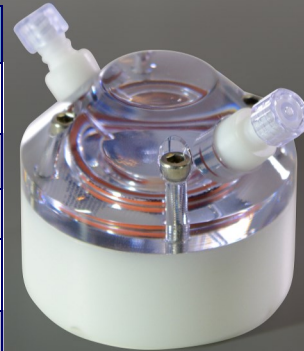

## RCCS-ISC POWER AND ENVIRONMENTAL SPECIFICATIONS

POWER	VOLTAGE	FREQUENCY
<b>Power Supply Input</b>	USA 120 VAC @ .25Amps OTHER 240 VAC @ .125Amps	50-60 Hz
<b>Power Supply Output</b>	7.5 VDC @ .8Amps	50-60 Hz
ENVIRONMENT	TEMPERATURE	HUMIDITY
<b>Base</b>	50-105 °F (10-40 °C)	0-100% RH
<b>Power Supply</b>	50-80 °F (10-27 °C)	0-75% RH



## RCCS-ISC COMPATIBLE CULTURE VESSELS

CULTURE VESSEL MODEL	SIZE	COMPATIBILITY
<b>Disposable HARV</b>	10 mL	Yes
<b>Disposable HARV</b>	50mL	Yes
<b>Autoclavable HARV</b>	1 mL	Yes
<b>Autoclavable HARV</b>	2 mL	Yes
<b>Autoclavable HARV</b>	4 mL	Yes
<b>Autoclavable HARV</b>	10 mL	Yes
<b>Autoclavable HARV</b>	50 mL	No
<b>Autoclavable STLV</b>	55 mL	No
<b>Autoclavable STLV</b>	110 mL	No
<b>Autoclavable STLV</b>	250 mL	No
<b>Autoclavable STLV</b>	500 mL	No

One Autoclavable HARV is provided with the RCCS-ISC System. All other compatible vessel types are ordered separately.  
Visit [www.synthecon.com](http://www.synthecon.com) for more details.



**3D Culture Systems**  
for a 3D World