

RCCS-8DQ

TECHNICAL SPECIFICATIONS-DIMENSIONS RCCS-8DQ

COMPONENT	HEIGHT	WIDTH	DEPTH
Base	9.0" (22.9 cm)	8.0" (20.3 cm)	8.25" (21.0 cm)
Power Supply	6.0" (15.25 cm)	12.5" (31.75 cm)	9.5" (24.1 cm)
COMPONENT	WEIGHT	ROTATIONAL SPEED	—
Base	8.0 lbs (3.77 Kg)	5-35 RPM	—
Power Supply	8.0 lbs (3.77 Kg)	—	—



RCCS-8DQ POWER AND ENVIRONMENTAL SPECIFICATIONS

POWER	VOLTAGE	FREQUENCY
Power Supply Input	85-260 VAC @ .5Amps	50-60 Hz
Power Supply Output	7.5 VDC @ 2.0Amps	50-60 Hz
ENVIRONMENT	TEMPERATURE	HUMIDITY
Base	50-105 °F (10-40 °C)	0-100% RH
Power Supply	50-80 °F (10-27 °C)	0-75% RH

RCCS-8DQ COMPATIBLE CULTURE VESSELS

CULTURE VESSEL MODEL	SIZE	COMPATIBILITY
Disposable HARV *	10 mL	Yes
Disposable HARV *	50mL	Yes
Autoclavable HARV	1 mL	No
Autoclavable HARV	2 mL	No
Autoclavable HARV	4 mL	No
Autoclavable HARV	10 mL	No
Autoclavable HARV	50 mL	No
Autoclavable STLV	55 mL	No
Autoclavable STLV	110 mL	No
Autoclavable STLV	250 mL	No
Autoclavable STLV	500 mL	No

* Disposable vessels are available in the High Aspect Ratio Vessels (HARVs). Each vessel is individually packaged and gamma sterilized. Vessels are supplied four to a pack. Eight disposable HARVs are provided with the RCCS-8DQ System. All other compatible vessel types are ordered separately. Visit www.synthecon.com for more details.

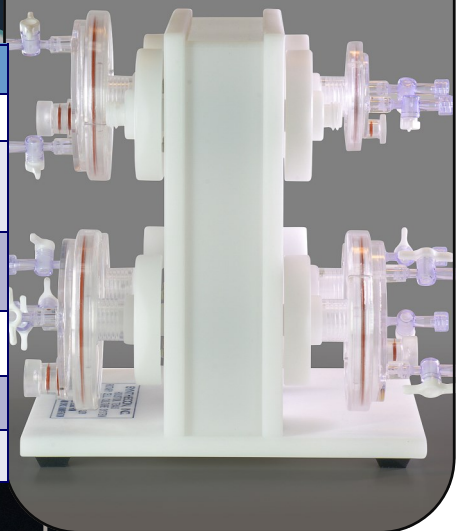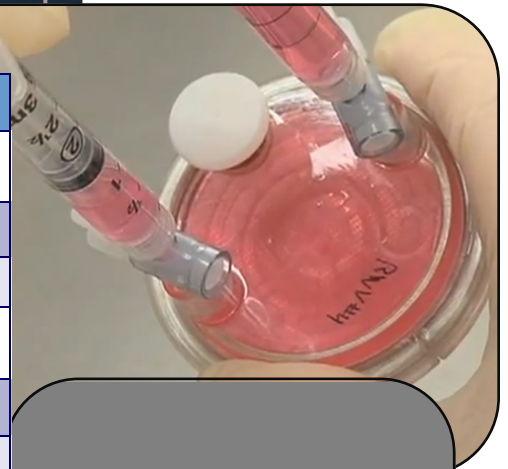

3D Culture Systems
for a 3D World



Primary Business Address
8977 Interchange Road
Houston, Texas
77054

Phone: 713-741-2582
Toll Free: 800-853-0740
Email: sales@synthecon.com
Website: <http://www.synthecon.com>

