

RCCS-2D

TECHNICAL SPECIFICATIONS-DIMENSIONS RCCS-2D

| COMPONENT | HEIGHT | WIDTH | DEPTH |
|---------------------|-------------------|------------------|----------------|
| Base | 5.0" (12.7 cm) | 4.0" (10.2 cm) | 8.0" (20.3 cm) |
| Power Supply | 2.5" (6.35 cm) | 5.0" (12.7 cm) | 5.5" (14.0 cm) |
| COMPONENT | WEIGHT | ROTATIONAL SPEED | — |
| Base | 2.4 lbs (1.13 Kg) | 5-35 RPM | — |
| Power Supply | 2.0 lbs (.94 Kg) | — | — |


RCCS-2D POWER AND ENVIRONMENTAL SPECIFICATIONS

| POWER | VOLTAGE | FREQUENCY |
|----------------------------|---|-----------|
| Power Supply Input | USA 120 VAC @ .25Amps OTHER 240 VAC @ .125Amps | 50-60 Hz |
| Power Supply Output | 7.5 VDC @ .8Amps | 50-60 Hz |
| ENVIRONMENT | TEMPERATURE | HUMIDITY |
| Base | 50-105 °F (10-40 °C) | 0-100% RH |
| Power Supply | 50-80 °F (10-27 °C) | 0-75% RH |

RCCS-2D COMPATIBLE CULTURE VESSELS

| CULTURE VESSEL MODEL | SIZE | COMPATIBILITY |
|--------------------------|--------|---------------|
| Disposable HARV * | 10 mL | Yes |
| Disposable HARV * | 50mL | Yes |
| Autoclavable HARV | 1 mL | No |
| Autoclavable HARV | 2 mL | No |
| Autoclavable HARV | 4 mL | No |
| Autoclavable HARV | 10 mL | No |
| Autoclavable HARV | 50 mL | No |
| Autoclavable STLV | 55 mL | No |
| Autoclavable STLV | 110 mL | No |
| Autoclavable STLV | 250 mL | No |
| Autoclavable STLV | 500 mL | No |

* Disposable vessels are available in the High Aspect Ratio Vessels (HARVs). Each vessel is individually packaged and gamma sterilized. Vessels are supplied four to a pack. Four disposable HARVs of choice are provided with the RCCS-2D System. All other compatible vessel types are ordered separately. Visit www.synthecon.com for more details.

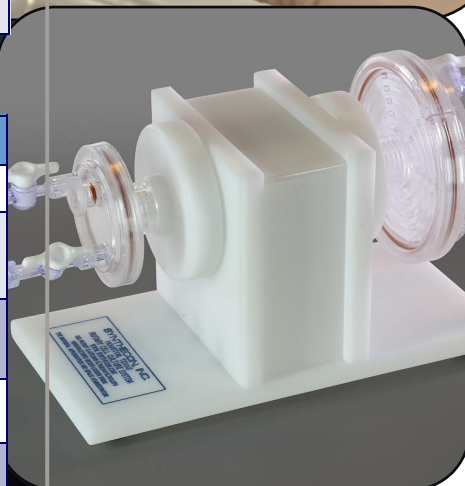

3D Culture Systems
for a 3D World



Primary Business Address
8977 Interchange Road
Houston, Texas
77054

Phone: 713-741-2582
Toll Free: 800-853-0740
Email: sales@synthecon.com
Website: <http://www.synthecon.com>

